




SANTONI™

ZENIT - F

SINGLE JERSEY THREE THREAD FLEECE MACHINE

单面三线卫衣针织圆机

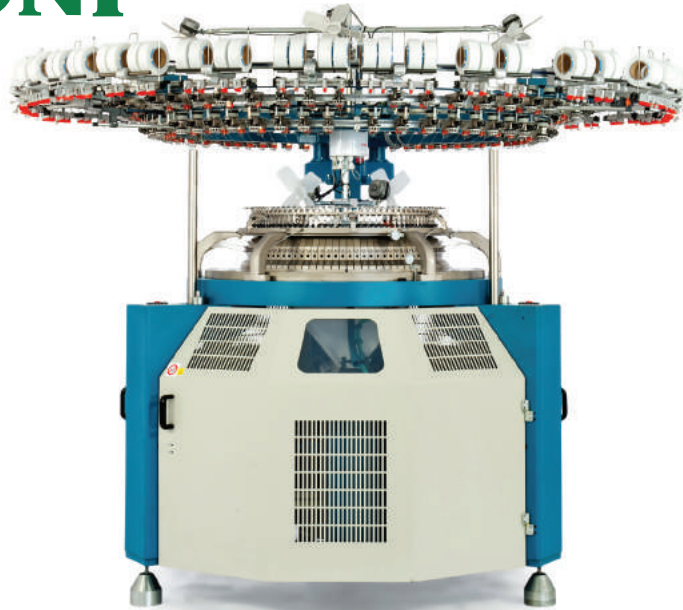

Higher productivity
更高的生产效率

Excellent fabric quality
完美的布面质量

User friendly
更好的客户体验

ZENIT-F 简介



- 每英寸3路4跑道单面针织圆机，可以编织或不编LYCRA。
- 可以编织2根或3根的添纱织物。
- 精确设计的沉降片三角，双重控制沉降片和沉降片片尾，不仅确保成圈均匀，而且减少沉降片的磨损。
- 机器装有经济而通用的织针，易于采购。
- 导纱嘴位于起来工作的织针前，即使在高速状态下，亦可完美垫纱。
- 独立三角座由特殊铝合金（Ergal）制成，具有超强散热功能。
- 牵拉装置的自动定位使落布卷更加快捷。
- 可以转换生产三线卫衣。
- 可以在圆筒机架或开幅机架（标准款和大卷装款）安装马达控制剪裁开幅刀和斜向导辊（Vignoni专利）。
- 只需简单操作即可将开幅机架换为圆筒机架。
- 非常紧凑的开幅机架，便于进入编织区域。

ZENIT-F BRIEF



- Single jersey machine with 3 feeders per diameter inch capable to knit up to 4 track structures, with/without lycra.
- Excellent to knit two or three yarn plaited fabrics.
- Double guidance sinker cams in combination with well designed sinkers with tail ensures uniform loops all over the fabric & less wear & tear of sinkers.
- Machine is equipped with economical & common needles easily available all over the world.
- Yarn carrier in front of the raised needles for a perfect plating at high speed.
- Individual cam shells made by special aluminum alloy(ergal) having a great heat dissipation property.
- Automatic positioning of the fabric take down for quick removal of fabric roll.
- Possibility to convert the machine for the production of three thread fleece.
- Available with tubular as well as Open width frame(standard and industrial)equipped with motorized slitting and opening system by oblique bars(Vignoni patent).
- Open version can easily be converted into tubular from by a simple operation.
- Very compact open frame for an easy access to the knitting head.

ZENIT - F

 推荐的织针为
is recommending needles from 



SANTONI™




筒径	30	32	34	36	Diameter	30	32	34	36
针距	12 - 24				Gauge	12 - 24			
路数	90	96	102	108	Number of feeds	90	96	102	108
最高转速	28	26	24	22	Maximum Speed (RPM)	28	26	24	22

		布卷/毫米	机架尺寸/毫米			Fabric roll/MM	Fabric size/MM
机架	标准圆筒机架	500		Frame	Tubular standard	500	
	大卷装圆筒机架	780	+ 500		Tubular industrial	780	+ 500
	大卷装圆筒机架	1080	+ 800		Tubular industrial	1080	+ 800

标准配置	<ul style="list-style-type: none"> - 侧纱架 - 积极送纱装置 - 独立的三角座, 可安装4跑道三角 - 自动加油系统 - 电动马达驱动 (变频器) - LFA线长测量装置 - 同步成圈三角调节 - 电子探针器 	Standard Equipment	<ul style="list-style-type: none"> - Aluminum side creel - Positive feeding units - Individual cam shells prepared to receive up to 4 cam tracks - Automatic oiling system - Electronic motor drive(inverter) - LFA-Yarn input measuring device - Centralized stitch control - Eletronic needles detector
------	---	--------------------	---

选配件	<ul style="list-style-type: none"> - 裸氨纶送纱器 - 摆布装置 - 大卷装机架 - 平针、三线卫衣套件 	Optional	<ul style="list-style-type: none"> - Lycra feeding units - Lapping device system - Industrial frame - S/J conversion kit
-----	--	----------	--

产品应用	外衣, 运动衣	Application area	Outwear, Sportswear
------	---------	------------------	---------------------

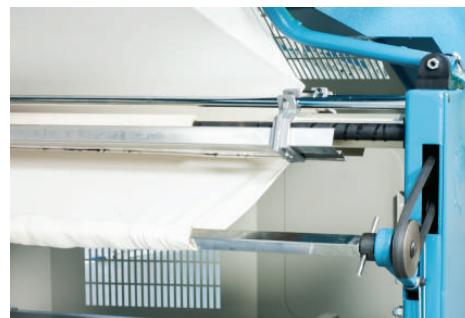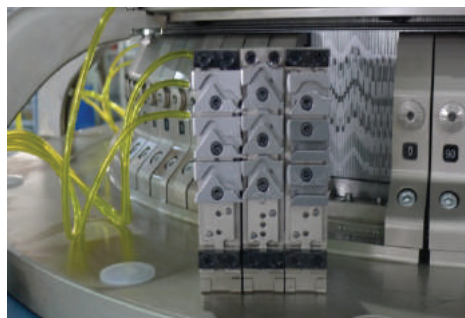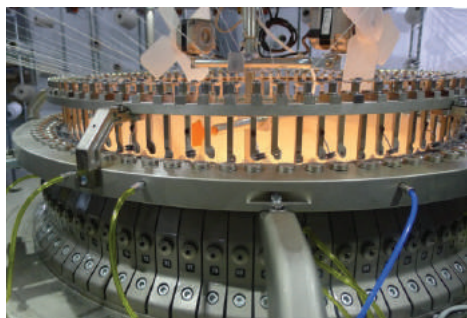

Disclaimer: All features in the brochure are for information only and subject to change without any prior notice. For a complete list of configuration, please contact Santoni Shanghai sales network.

声明: 宣传单中的所有信息仅作参考, 圣东尼公司有权先行修改。请联系圣东尼 (上海) 销售部查询完整配件清单。

2017 V02